




### 特徴

- \* 材質は耐熱プラスチックでできており腐食を防ぎます。
- \* 切断することにより、長さを自在に調整できます。
- \* 組込みが容易
- \* 最高使用温度：Z968, Z969 135℃      Z96, Z961 200℃
- \* 一条ネジ、二条ネジ用の二種類。(使用例：下記図参照ください。)



### Z968/... 一条ネジ      材質:PA,GFK      最高使用温度：135℃

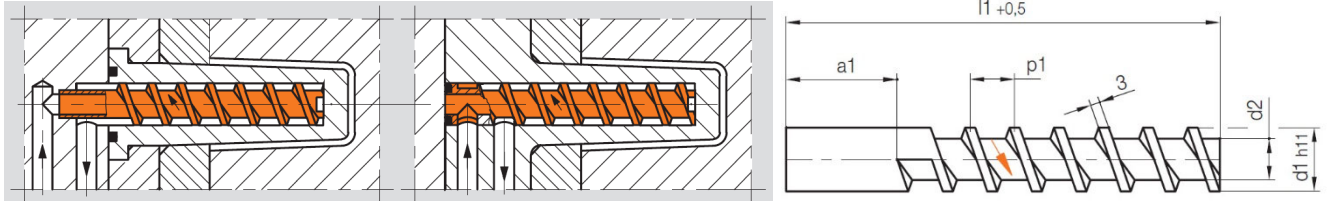


| p1 | a1 | d2 | d1  | l1               | Nr. / No.        |
|----|----|----|-----|------------------|------------------|
| 14 | 35 | 8  | 12  | 125              | Z 968 / 12 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    |    | 11 | 16  | 125              | Z 968 / 16 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    | 13 | 20 | 125 | Z 968 / 20 x 125 |                  |
|    |    |    | 160 | 160              |                  |
|    |    |    | 200 | 200              |                  |
|    | 15 | 25 | 125 | Z 968 / 25 x 125 |                  |
|    |    |    | 160 | 160              |                  |
|    |    |    | 200 | 200              |                  |

| p1 | a1 | d2 | d1  | l1               | Nr. / No.        |
|----|----|----|-----|------------------|------------------|
| 18 | 35 | 22 | 32  | 125              | Z 968 / 32 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    |    | 26 | 40  | 125              | Z 968 / 40 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    | 32 | 50 | 125 | Z 968 / 50 x 125 |                  |
|    |    |    | 160 | 160              |                  |
|    |    |    | 200 | 200              |                  |



### Z969/... 二条ネジ      材質:PA,GFK      最高使用温度：135℃

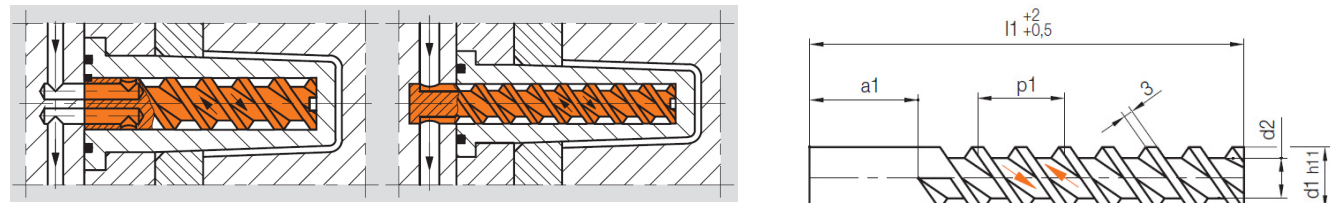



| p1 | a1 | d2 | d1  | l1               | Nr. / No.        |
|----|----|----|-----|------------------|------------------|
| 28 | 35 | 8  | 12  | 125              | Z 969 / 12 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    |    | 11 | 16  | 125              | Z 969 / 16 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    | 13 | 20 | 125 | Z 969 / 20 x 125 |                  |
|    |    |    | 160 | 160              |                  |
|    |    |    | 200 | 200              |                  |
|    | 15 | 25 | 125 | Z 969 / 25 x 125 |                  |
|    |    |    | 160 | 160              |                  |
|    |    |    | 200 | 200              |                  |

| p1 | a1 | d2 | d1  | l1               | Nr. / No.        |
|----|----|----|-----|------------------|------------------|
| 36 | 35 | 22 | 32  | 125              | Z 969 / 32 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    |    | 26 | 40  | 125              | Z 969 / 40 x 125 |
|    |    |    |     | 160              | 160              |
|    |    |    |     | 200              | 200              |
|    | 32 | 50 | 125 | Z 969 / 50 x 125 |                  |
|    |    |    | 160 | 160              |                  |
|    |    |    | 200 | 200              |                  |



上記スパイラルコアの他に、Z96/...(一条ネジ)及びZ961...(二条ネジ)もございます。(裏面参照)

**Z96/... 一条ネジ 材質 : DIN3.2315 最高使用温度 : 200°C**

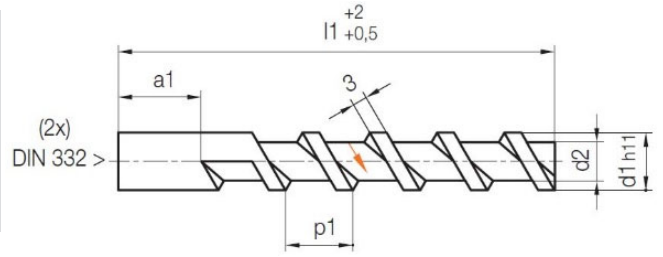
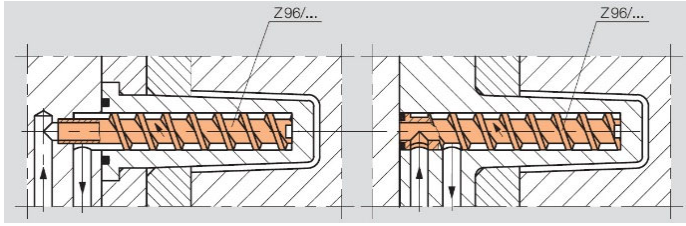


| p1 | a1 | d2  | d1       | l1  | Nr. / No.       |
|----|----|-----|----------|-----|-----------------|
| 14 | 35 | 8   | 12       | 125 | Z 96 / 12 x 125 |
|    |    |     |          | 200 | 200             |
|    |    | 11  | 16       | 125 | 16 x 125        |
|    |    |     |          | 200 | 200             |
|    |    | 13  | 20       | 125 | 20 x 125        |
|    |    |     |          | 200 | 200             |
| 15 | 25 | 125 | 25 x 125 |     |                 |
|    |    | 200 | 200      |     |                 |

| p1 | a1 | d2  | d1       | l1  | Nr. / No.       |
|----|----|-----|----------|-----|-----------------|
| 18 | 35 | 22  | 32       | 125 | Z 96 / 32 x 125 |
|    |    |     |          | 200 | 200             |
|    |    | 26  | 40       | 125 | 40 x 125        |
|    |    |     |          | 200 | 200             |
| 32 | 50 | 125 | 50 x 125 |     |                 |
|    |    | 200 | 200      |     |                 |



**Z961.... 二条ネジ 材質 : DIN3.2315 最高使用温度 : 200°C**

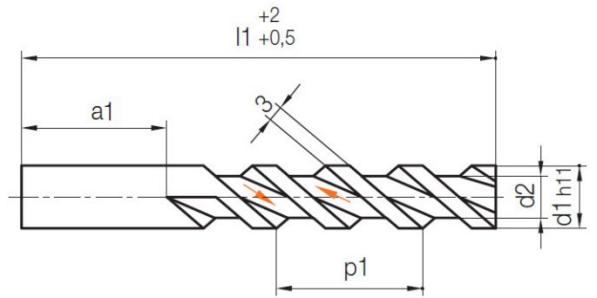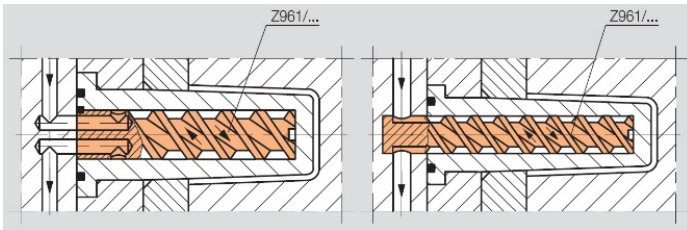

| p1 | a1 | d2  | d1       | l1  | Nr. / No.        |
|----|----|-----|----------|-----|------------------|
| 28 | 35 | 8   | 12       | 125 | Z 961 / 12 x 125 |
|    |    |     |          | 200 | 200              |
|    |    | 11  | 16       | 125 | 16 x 125         |
|    |    |     |          | 200 | 200              |
|    |    | 13  | 20       | 125 | 20 x 125         |
|    |    |     |          | 200 | 200              |
| 15 | 25 | 125 | 25 x 125 |     |                  |
|    |    | 200 | 200      |     |                  |

| p1 | a1 | d2  | d1       | l1  | Nr. / No.        |
|----|----|-----|----------|-----|------------------|
| 36 | 35 | 22  | 32       | 125 | Z 961 / 32 x 125 |
|    |    |     |          | 200 | 200              |
|    |    | 26  | 40       | 125 | 40 x 125         |
|    |    |     |          | 200 | 200              |
| 32 | 50 | 125 | 50 x 125 |     |                  |
|    |    | 200 | 200      |     |                  |

